
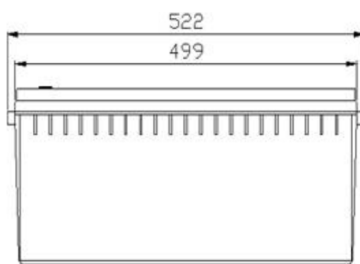
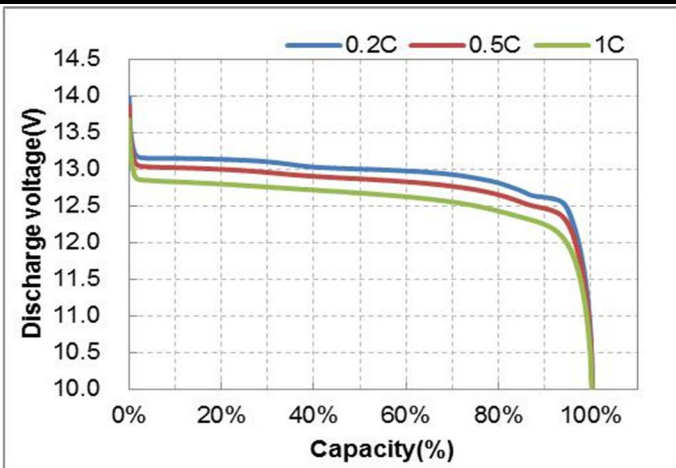
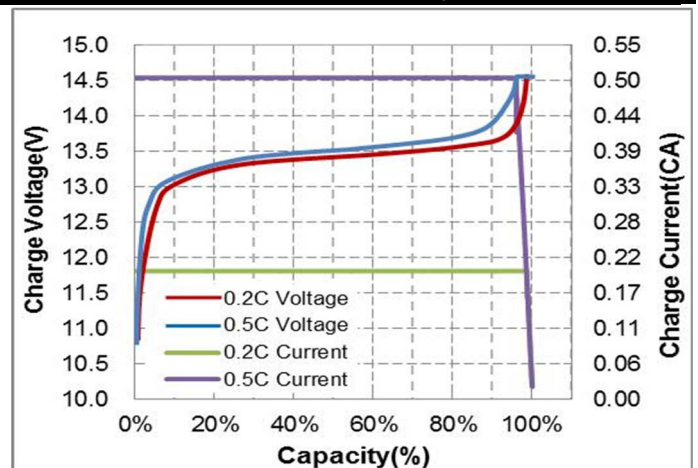
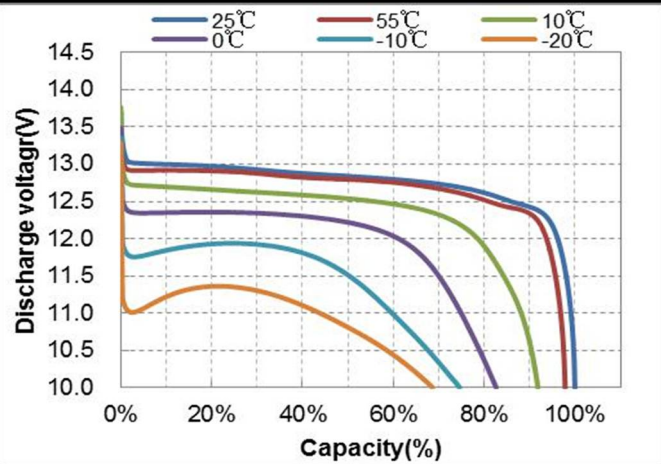
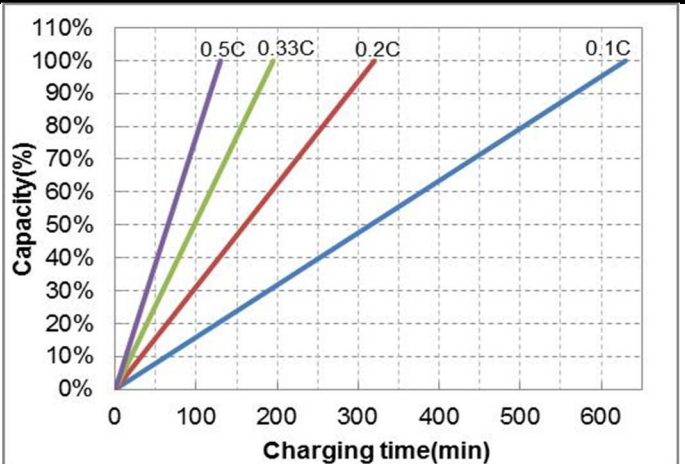
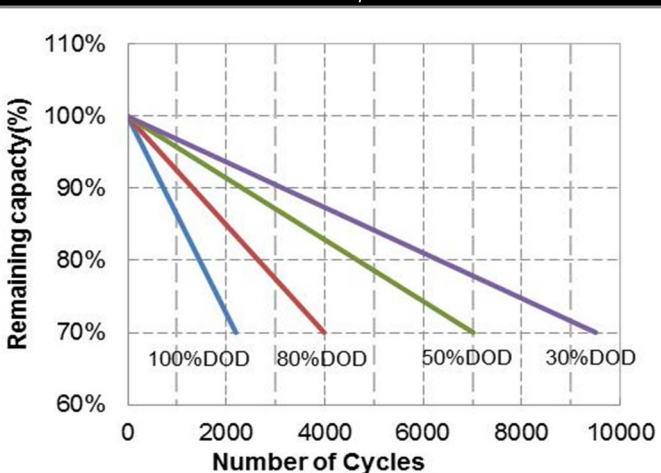



DATASHEET
LFP12V200AH
12V 200AH
LITHIUM IRON PHOSPHATE (LiFePO4) BATTERY

- ◆ Superior safety, thousands of cycles, 100%DOD, under normal conditions ◆
- Built-in automatic protection for over-charge, over discharge, over current and over temperature ◆
- Maintenance free ◆
- Internal cell balancing ◆
- Lighter weight: About 40% ~50% of the weight of a lead acid battery. ◆
- Can be charged using most standard lead-acid charges (set) ◆
- Wider temperature range:-20°C ~60°C

SPECIFICATIONS


Nominal Voltage	12,8V
Nominal Capacity	200Ah@0.2C
Energy	2560Wh
Internal Resistance	35≤mΩ
Cycle Life	>2000 Cycles @ 0.2C Charge/Discharge at 100%DOD,End of Life 70% Capacity
Months Self Discharge	≤3.5% per month at 25°C
Charge Voltage	14.6±0.2V
Charge Mode (CC/CV)	At 0°C~45°C temperature, charged to 14.6V at a constant current of 0.2C5A, and then,changed continuously with constant voltage of 14.6V until the current was not more than 0.02C5A.
Charger Current	40A
Max.Charge Current	100A
Discharge Current	40A
Max. Continuous Current	100A
Max.Pulse Current	200A(< 3S)
Discharge Cut-off Voltage	10.0V
Charge Temperature	0°C to 45°C(32°F to 113°F) @60±25% Relative Humidity
Discharge Temperature	-20°C to 60°C(-4°F to 140°F) @60±25% Relative Humidity
Storage Temperature	0°C to 45°C(32°F to 113°F) @60±25% Relative Humidity
Water Dust Resistance	IP55
Cell & Method	IFR32700 N60, 4S34P
Plastic Case	ABS
Dimension(L*W*H*TH)	522*238*218*220mm
Weight	Approx. 27Kg
Terminal	M8

DIFFERENT RATE DISCHARGE CURVE @25°C

CHARGE CHARACTERISTICS OF CAPACITY-VOLTAGE @0.2C&0.5C, 25°C

DIFFERENT TEMPERATURE DISCHARGE CURVE @0.5C

CHARGE CHARACTERISTICS OF TIME-VOLTAGE @ 25°C

DIFFERENT DOD DISCHARGE CYCLE LIFE CURVE @0.2C,25

OPEN CIRCUIT VOLTAGE VS SOC% @25
