

## OPzV2-2000



### Applications

- > Solar / wind energy and other new energy storage
- > Power systems
- > Telecommunications system
- > UPS/EPS
- > Auto control system
- > Other general purpose

### General Features


- > Tubular plate design to enhance battery performance
- > Tubular plate design makes long battery life
- > Relatively rich electrolyte, high temperature and low temperature performance is superior
- > Long cycle life, excellent deep cycle discharge ability
- > Excellent charge acceptance ability
- > Precision sealing technology

### Specification

Nominal Voltage	2V		
Nominal Capacity	2000Ah		
Design life	20 years		
Terminal	M8		
Approx. Weight	Approx 153kg (338lbs)		
Container Material	ABS		
Rated Capacity	2000Ah	10Hour Rate	(200A to 1.80V)
	1512Ah	3Hour Rate	(504A to 1.80V)
	1110Ah	1Hour Rate	(1110A to 1.75V)
Internal resistance	Full charged at 25°C: 0.32 mΩ		
Max. Discharge Current	10000A(5S)		
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F)		
	Charge : -20 ~50°C(-4~ 122°F)		
	Storage: -20 ~50°C(-4~ 122°F)		
Charge current:	Max. 400.0A □ Recom.200.0A		
Charge Method (25 °C)	Float Charge:2.23-2.27V,recom.2.25V(-3mV/ °C)		
	Equalize charge:2.30-2.35V,recom.2.35V(-4mV/ °C)		
	Cycle charge:2.40-2.50V,recom.2.40V(-5mV/ °C)		
Self discharge	3% of capacity declined per month at 25°C		



Dimension: 399(L)× 212 (W) × 772 (H)×807(TH) Unit: mm

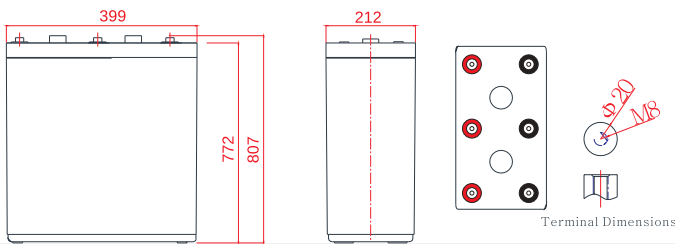

### Constant Current Discharge Characteristics Unit: A (25°C,77°F)

FV/Time	15min	30min	1h	2 h	3 h	5 h	8h	10h	20h
1.60V	2190	1750	1210	7 4 7	5 3 6	3 6 8	259	212	114
1.65V	2080	1670	1190	7 3 3	5 2 9	3 6 3	255	211	113
1.70V	1980	1560	1150	7 1 5	5 2 1	3 5 6	251	207	111
1.75V	1870	1460	1110	6 9 6	5 1 3	3 4 8	248	204	109
1.80V	1680	1340	1040	6 7 3	5 0 4	3 3 9	243	200	107
1.85V	1420	1190	9 7 3	6 4 7	4 8 4	3 2 7	236	196	104


### Constant Power Discharge Characteristics Unit: W/cell (25 °C, 77 °F)

FV/Time	15min	30min	1h	2 h	3 h	5 h	8 h	10h	20h
1.60V	4370	3470	2350	1470	1130	7 5 5	540	448	240
1.65V	4160	3300	2230	1450	1100	7 4 4	531	429	235
1.70V	3980	3160	2170	1420	1070	7 2 8	520	428	229
1.75V	3770	3020	2090	1380	1040	7 0 9	508	420	224
1.80V	3580	2910	2100	1340	1010	6 8 8	495	409	219
1.85V	3280	2750	1920	1270	9 6 1	6 5 5	476	397	212


Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

# OPzV2-2000


Discharge characteristic

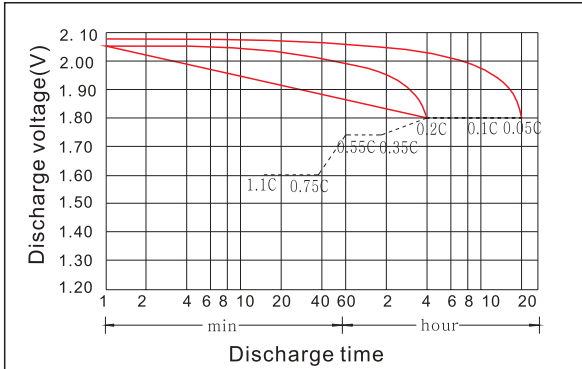


Charging characteristic

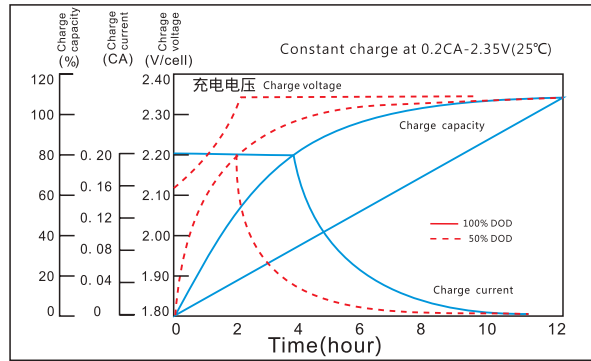


The effect of temperature on capacity

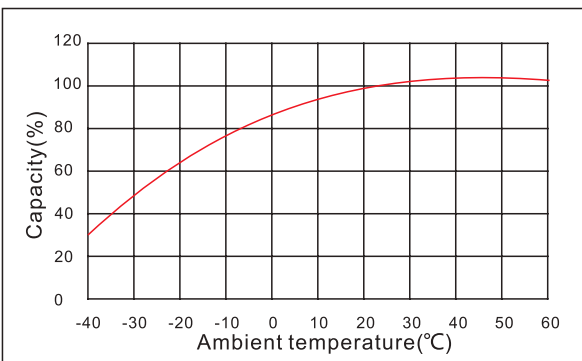

The effect of discharge depth on cycle life

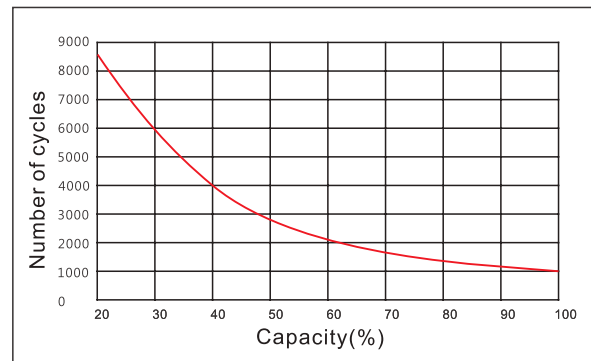

Curves of self-discharge

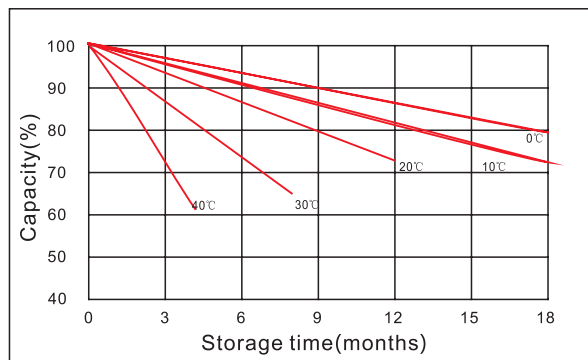

Curves of open circuit voltage vs. capacity

