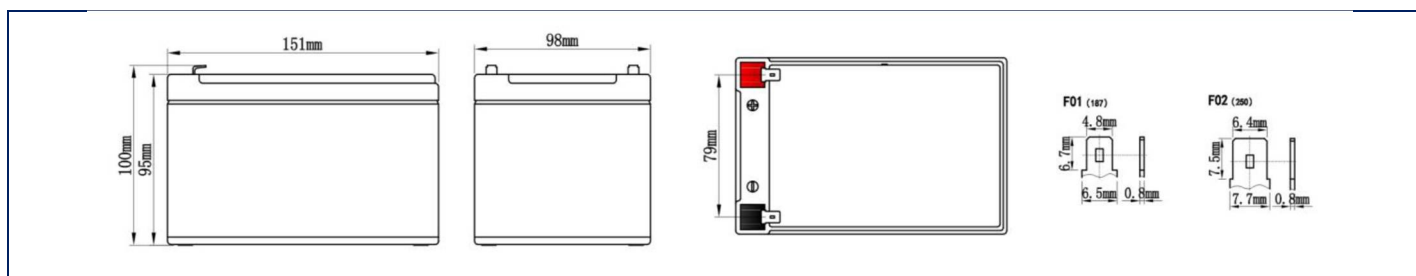


DATASHEET
SLC 12-12
12V 12AH

AGM SEALED VRLA BATTERY
5-6 YEARS OF EXPECTED LIFETIME (EUROBAT)
SPECIFICATIONS

Nominal Voltage	Nominal Capacity	Dimension ±2mm				Weight ±2%	Max Discharge Current (5s)	Internal Resistance	Standard Terminal	Container Material
		L	W	H	TH					
12V	12AH	151mm	98mm	95mm	100mm	3.45kg	180A	≈15.5 mΩ	T2	ABS


CONSTANT-VOLTAGE CHARGE

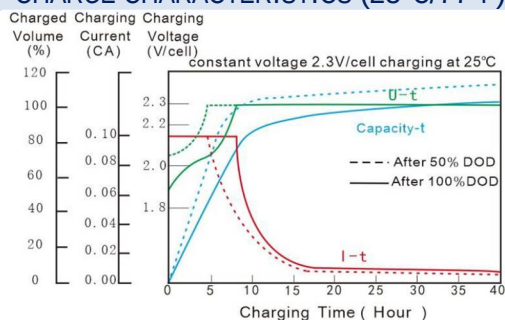
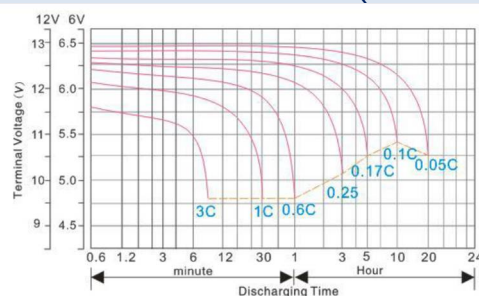
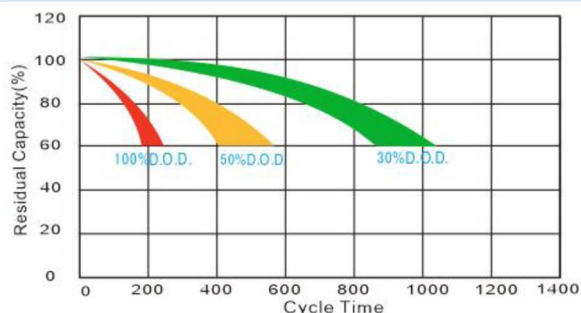
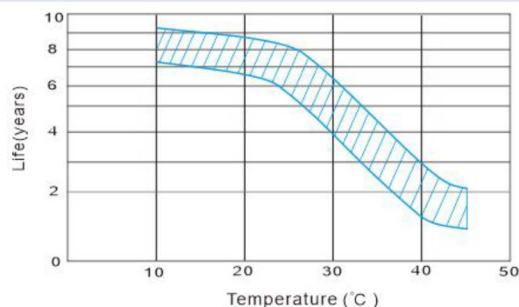
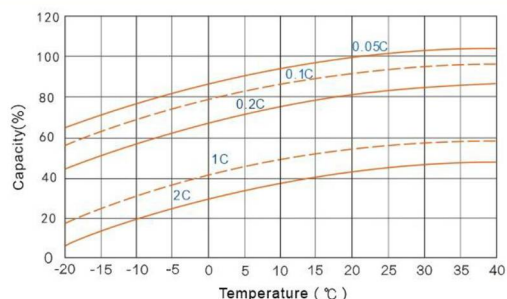
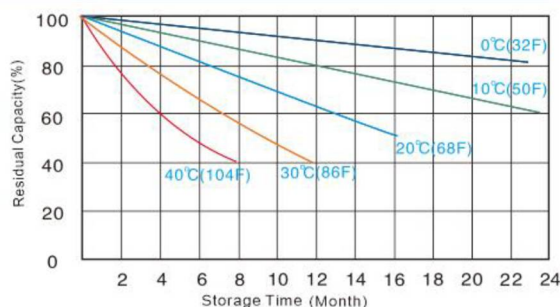
Rated Capacity	
20 hour rate (0.6A)	12.2AH
10 hour rate (1.2A)	11.4AH
5 hour rate (2.04A)	10.1AH
27 min rate (12A)	6.0AH
7 min rate (36A)	4.2AH
Capacity affected by temperature	
40°C (104°F)	103%
25°C (77°F)	100%
0°C (32°F)	86%

Nominal Operating Temp. Range
25 ± 3°C (77 ± 5°F)

Cycle Application
1. Limit initial current less than 3.0A.
2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77°F).
3. Hold at 14.1V to 14.4V until current drop to under 0.072A for at least 3 hrs.
4. Temperature compensation coefficient of charging voltage is -30mV/°C.
Standby Service
1. Hold battery across constant voltage source of 13.6 to 13.8 volts with current limit 3.0A continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charge status.
2. Temperature compensation coefficient of charging voltage is -18mV/°C.

Operating Temperature		
Discharge: -15 ÷ 50°C	Charge: 0 ÷ 40°C	Storage: -15 ÷ 40°C

NOTE : The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfation

CHARGE CHARACTERISTICS (25°C/77°F)

DISCHARGE CHARACTERISTIC (25°C/77°F)

CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

TEMPERATURE VS FLOAT LIFE

CAPACITY CURVE AT DIFFERENT TEMPERATURE

SELF DISCHARGE CHARACTERISTICS

Constant Current Discharge (Amperes) at 25°C (77°F)

End Voltage (V)	10 min	15 min	30 min	45 min	1 h	1,5 h	2 h	3 h	5 h	8 h	10 h	20 h
9.6V	31.9	24.9	12.7	8.98	7.56	6.02	4.48	3.38	2.16	1.44	1.18	0.624
9.9V	30.3	23.7	12.1	8.67	7.38	5.87	4.37	3.30	2.11	1.41	1.17	0.618
10.2V	28.9	22.6	11.5	8.38	7.20	5.73	4.26	3.22	2.06	1.38	1.16	0.612
10.5V	28.6	22.4	11.5	8.30	7.15	5.63	4.10	3.11	2.02	1.37	1.15	0.606
10.8V	28.3	22.2	11.3	8.22	7.10	5.52	3.94	3.00	1.98	1.35	1.14	0.600

Constant Power Discharge (Watts) at 25°C (77°F)

End Voltage (V)	10 min	15 min	30 min	45 min	1 h	1,5 h	2 h	3 h	5 h	8 h	10 h	20 h
9.6V	385	311	176	124	92.9	71.3	53.6	38.3	25.2	17.6	14.0	7.51
9.9V	366	296	167	120	90.6	69.5	52.3	37.3	24.6	17.2	13.8	7.43
10.2V	349	282	159	116	88.4	67.8	51.0	36.4	24.0	16.9	13.7	7.36
10.5V	337	274	156	114	87.0	66.8	50.3	35.6	23.7	16.8	13.5	7.26
10.8V	325	265	152	111	85.6	65.8	49.6	35.0	23.5	16.6	13.3	7.16