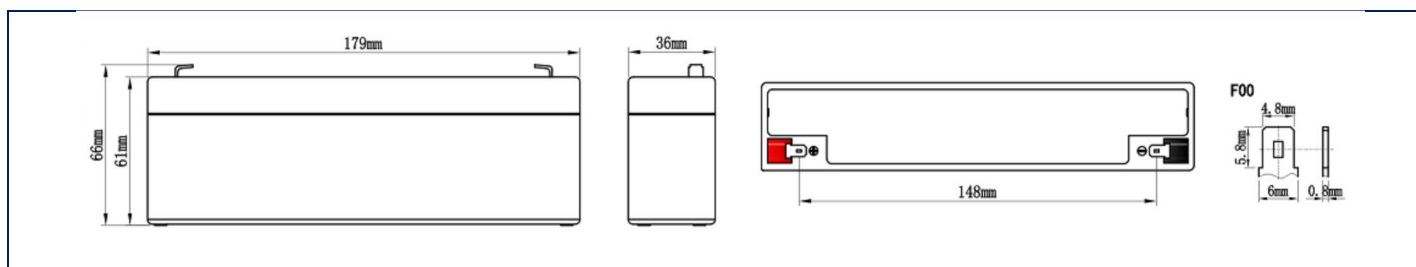



DATASHEET
SLC 2,3-12
12V 2,3AH
AGM SEALED VRLA BATTERY
5-6 YEARS OF EXPECTED LIFETIME (EUROBAT)
SPECIFICATIONS

Nominal Voltage	Nominal Capacity	Dimension ±2mm				Weight ±2%	Max Discharge Current (5s)	Internal Resistance	Standard Terminal	Container Material
		L	W	H	TH					
12V	2,3AH	179mm	36mm	61mm	66mm	0.86kg	34.5A	≈70 mΩ	T1	ABS


CONSTANT-VOLTAGE CHARGE

Rated Capacity	
20 hour rate (0.11A)	2.30AH
10 hour rate (0.22A)	2.07AH
5 hour rate (0.374A)	1.90AH
27 min rate (2.2A)	1.10AH
7 min rate (6.6A)	0.80AH
Capacity affected by temperature	
40°C (104°F)	103%
25°C (77°C)	100%
0°C (32°F)	86%


Nominal Operating Temp. Range
25±3°C (77±5°F)

Cycle Application
1. Limit initial current less than 0.55A.
2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77°F).
3. Hold at 14.1V to 14.4V until current drop to under 0.0132A for at least 3 hrs.
4. Temperature compensation coefficient of charging voltage is -30mV/°C.
Standby Service
1. Hold battery across constant voltage source of 13.6 to 13.8 volts with current limit 0.55A continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charge status.
2. Temperature compensation coefficient of charging voltage is -18mV/°C.


Operating Temperature		
Discharge: -15÷50°C	Charge: 0÷40°C	Storage: -15÷40°C

NOTE : The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfation


CHARGE CHARACTERISTICS (25°C/77°F)

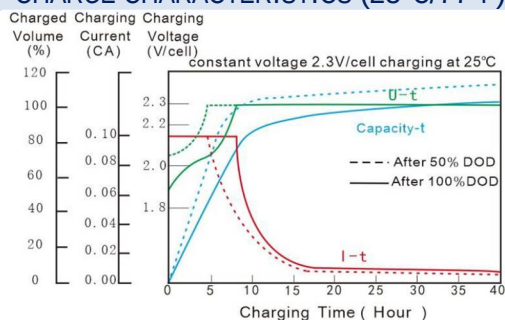


DISCHARGE CHARACTERISTIC (25°C/77°F)

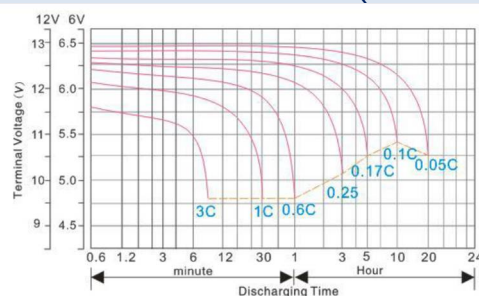


CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

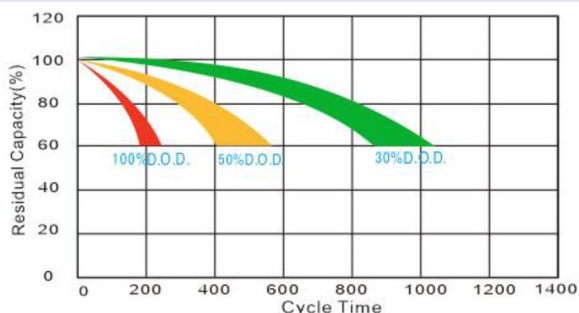


TEMPERATURE VS FLOAT LIFE

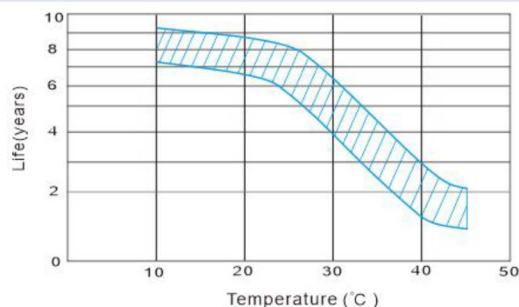

CAPACITY CURVE AT DIFFERENT TEMPERATURE

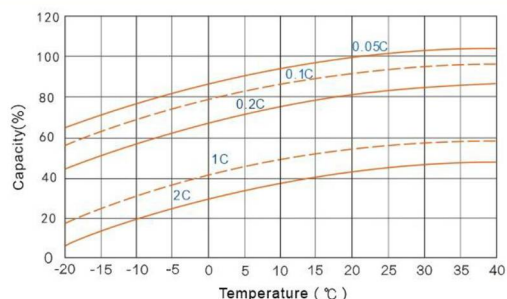

SELF DISCHARGE CHARACTERISTICS

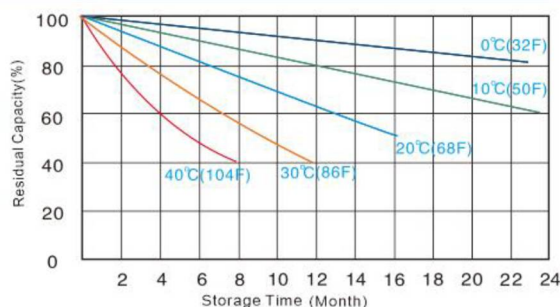

Constant Current Discharge (Amperes) at 25°C (77°F)

End Voltage (V)	10 min	15 min	30 min	45 min	1 h	1,5 h	2 h	3 h	5 h	8 h	10 h	20 h
9.6V	6.05	4.74	2.42	1.71	1.44	1.14	0.849	0.643	0.415	0.275	0.215	0.118
9.9V	5.76	4.52	2.31	1.65	1.40	1.12	0.828	0.627	0.405	0.269	0.213	0.117
10.2V	5.49	4.30	2.20	1.60	1.37	1.09	0.808	0.612	0.395	0.264	0.211	0.116
10.5V	5.44	4.26	2.18	1.59	1.36	1.07	0.777	0.591	0.386	0.262	0.209	0.115
10.8V	5.39	4.22	2.16	1.57	1.35	1.05	0.746	0.568	0.375	0.259	0.207	0.114

Constant Power Discharge (Watts) at 25°C (77°F)

End Voltage (V)	10 min	15 min	30 min	45 min	1 h	1,5 h	2 h	3 h	5 h	8 h	10 h	20 h
9.6V	73.0	59.1	33.4	23.7	17.7	13.5	10.2	7.27	4.79	3.34	2.65	1.43
9.9V	69.6	56.3	31.8	22.9	17.2	13.2	9.93	7.09	4.67	3.27	2.63	1.41
10.2V	66.3	53.6	30.3	22.1	16.8	12.9	9.69	6.92	4.56	3.21	2.60	1.40
10.5V	64.1	52.1	29.7	21.6	16.5	12.7	9.56	6.76	4.52	3.18	2.56	1.38
10.8V	61.7	50.4	28.8	21.0	16.3	12.5	9.42	6.64	4.46	3.15	2.52	1.36